OPTIONS



Scratch plate: easy to mount smooth frontpanel-overlay to avoid damage of the miXboX-users hand



Mounting lips: to build-in the miXboX



A set of matching **RODEC** slipmats for your turntables near the miXboX.

DEALER:

MANUFACTURED BY:

address: **Transtel Sabima Ltd.**
Harmoniestraat 13
B-2018 Antwerpen
Belgium

phone: **00 32(0)3/237-36-07**
fax: **00 32(0)3/216-97-62**

email: **info@rodec.be**
url: **http://www.rodec.be**

RODEC® is a registered trademark of Transtel Sabima Ltd. Copyright © Transtel Sabima Ltd. 2000 (All rights reserved)
Transtel Sabima Ltd. reserves the right to modify the design and/or specifications product without prior notice.

RODEC®


MIXBOX

DESIGNED FOR MIX-JUNKIES



AVAILABLE IN TWO COLORS: SILVER GREY AND DARK GREY.

for more info: www.rodec.be

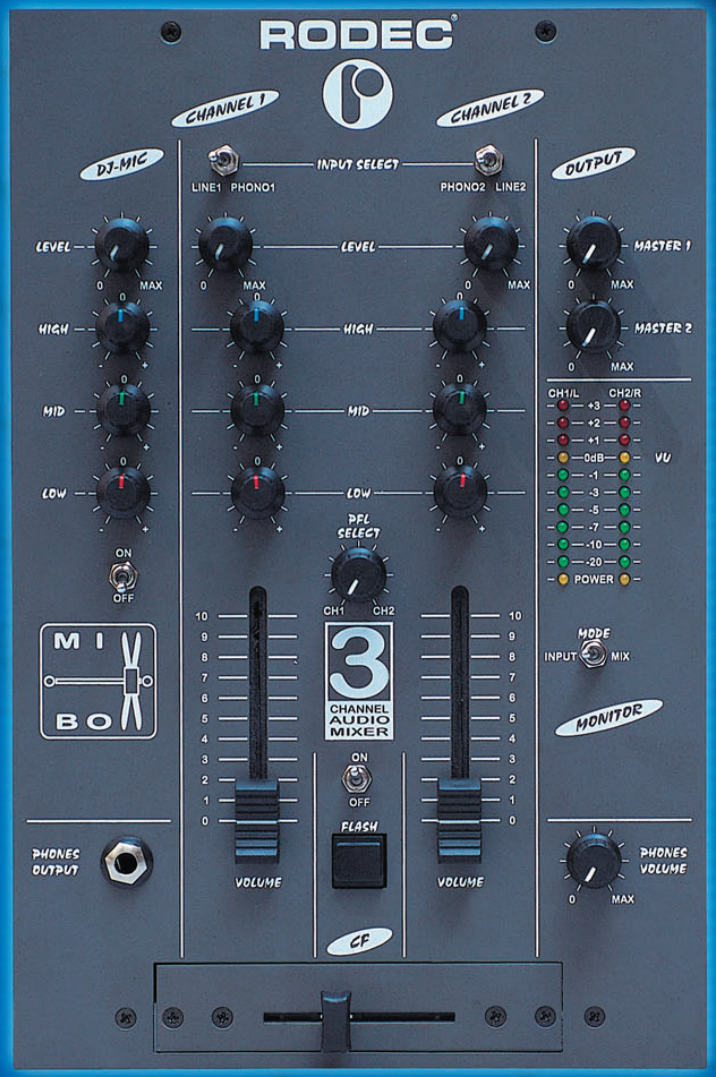



TECHNICAL SPECIFICATIONS

Inputs	Inputs sensitivity	Signal/Noise	Remarks
2 x PHONO 2 x CD/MD 1 x MIC DJ assymm. symm.	2.3mV/50kΩ 220mV/50kΩ 2.2mV/50kΩ 0.5mV/22kΩ	<-77dB <-86dB <-79dB	RIAA correction Bass cut off filter
Outputs			
Master 1-2 assymm. AUX/REC out Phones	775mV/10kΩ 775mV/10kΩ 10V/600Ω		Subsonic filter Subsonic filter Phones 200-600Ω

- THD: < 0.02%
- Tone controls: Music Bass +/-13dB @ 100Hz (+/-21dB @ 20Hz)
  Mid +/-13dB @ 1kHz (+/-21dB @ 20Hz)
  High +/-13dB @ 10kHz
- Subsonic filter: -25dB @ 10Hz
- Power source: Standard: 230V / 50Hz-60Hz
  On request: 100V-117V / 50Hz-60Hz
- Approbation: CE-approved
- Dimensions: Front: 203mm x 310mm (8" x 7HE)
  Chassis: 197 x 304 x 83
- Weight: 3.2kg

STANDARD FEATURES

8 inch width - 7 units - mixing panel. Available in 2 colours (Silver grey / Dark grey) Same height as Technics SL1210-MKII turntable 5 Selectable input sources 3 Channels: Channel 1 + 2: Switchable CD/MD or Phono, DJ-mic channel: Microphone input Crossfader for fast fading between channels 1-2 Gain control and triple equalizer tone control on all channels Soft touch fader- and rotative knobs for better grip PFL - mix possibility between channels 1 and 2 Two bright VU-meters to show the levels of the inputs or the level of the mixed signal Easy replaceable high quality crossfader One flash button to suddenly mix-in the channel that is not selected by the crossfader Crossfader on/off switch Two volume controlled master outputs (also useable as monitor or booth output) One auxiliary/recording output Strong headphones output with volume control Headphones output can easily be mounted on the front Power switch on the back of the panel, to avoid accidentally switching off the panel Free spare crossfader included.



SPECIAL FEATURES

Headphones output can easily be mounted on the front.



Easy replaceble high quality crossfader.