RODEC®

ALC-01

AUDIO LEVEL CONTROLLER



SINGLE UNIT



DUAL UNIT

USAGE

Clubs ◆ Cafés ◆ Halls

STANDARD FEATURES

Easy configurable Audio level controller ◆ Protects your sound system and complies with you on the government regulations ◆ Can be connected to every existing audio system, between mixing panel (pre-amplifier) and power-amplifier ◆ Two versions: a single two channel 19" unit and a dual two channel 19" unit ◆ Symmetrical in- and outputs on TRS-JACK ◆ RCA adapters included ◆ Built in Noise-gate to avoid noise and hum when there is no input signal ◆ Can be sealed to avoid sabotage or unauthorized change of settings

OPTIONS

Remote control

for more info: www.rodec.be


RODEC® ALC-01



SINGLE UNIT



DUAL UNIT

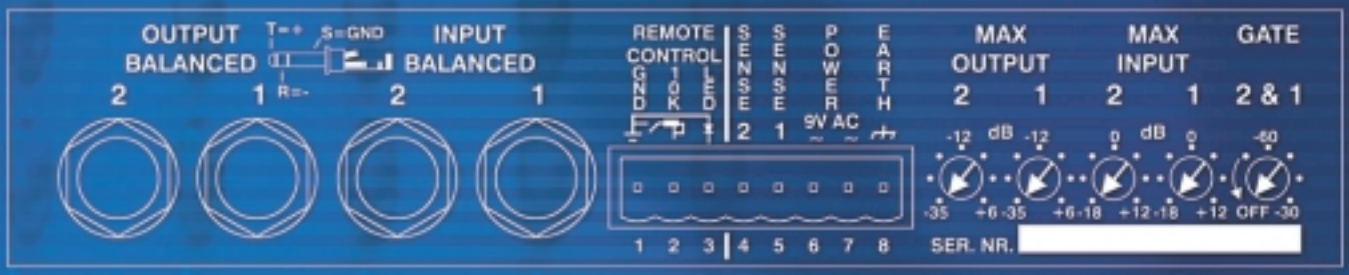

TECHNICAL SPECIFICATIONS

- Noise gate trim:	Off / -80dB to 30dB
- Controls:	Max. input level (-18/+12dB), Gain (-35/+6dB)
- Remote VCA control:	(cable: 2wire + screen) off: 0dB range
- Measuring source:	Audio input signal (others optional)
- Frequency response:	10Hz - 25kHz
- Signal to noise ratio:	>87dB
- THD:	<0.05%
- Inputs:	+29.2dBm max./ 20k balanced
- Outputs:	Balanced 100Ω
- Approbation:	CE-approved
- Power consumption:	9VAC / 10VA (power adapter)
- Dimensions:	Front: 482mm x 44mm (19" x 1HE)
	Chassis: 205mm x 44mm x 185mm
- Weight:	1.3 Kg Single 19" unit (unpacked)
	2.2 Kg Dual 19" unit (unpacked)

DEALER:

MANUFACTURED BY:

address: **Transtel Sabima Ltd.**
Harmoniestraat 13
B-2018 Antwerpen
Belgium

phone: **00 32(0)3/237-36-07**
fax: **00 32(0)3/216-97-62**

e-mail: **info@rodec.be**
URL: **http://www.rodec.be**

RODEC® is a registered trademark of Transtel Sabima Ltd. Copyright © Transtel Sabima Ltd. 1999 (All rights reserved).
Transtel Sabima Ltd. reserves the right to modify the design and/or specifications without prior notice.