RODEC®

Multi Source II

Mixer / Pre-amplifier



FIELD OF APPLICATION

Cafés ◆ Restaurants ◆ Taverns ◆ Bars ◆ Domestic

STANDARD FEATURES


19" 2HE mixer-preamplifier ◆ Two mixing channels, with inputs selecteable of two groups of 4 input sources (3 stereo line inputs and 1 phono input) ◆ One DJ-mic input at the front, with input-level control, triple tone control and a volume potmeter ◆ Gain control and triple equalizer on each channel ◆ Clip LED on each input ◆ Channel volume control with fader ◆ Crossfader between the two input channels ◆ Balance potmeter ◆ Two master outputs and one record output ◆ Two short VU-meters ◆ One strong headphones output with volume control ◆ Headphones split possibility: Input A (mono) left ear and input B (mono) right ear ◆ Fast and noise-free inputs for the CD, MD and DAT signal sources

for more info: www.rodec.be

RODEC Multi Source II

Mixer / Pre-amplifier



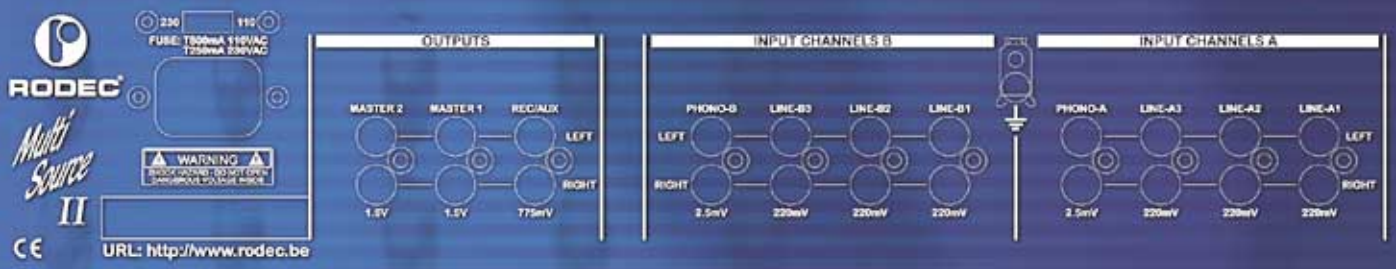

TECHNICAL SPECIFICATIONS

- THD:	< 0.02%
- Tone controls:	Bass +/-12dB @ 80Hz Middle +/-12dB @ 800Hz High +/-12dB @ 7.5kHz
- Power source:	standard: 230V / 50Hz-60Hz on request: 100V-117V / 50Hz-60Hz
- Fuse:	T250mA/230VAC - T500mA/110VAC
- Power consumption:	OFF=0VA ON=22VA
- Approbation:	CE
- Dimensions:	Front: 482mm x 89mm (19" x 2HE) Chassis: 440mm x 223mm x 92mm
- Weight:	3.0kg

Inputs	Inputs sensitivity	Signal/Noise	Remarks
2 x PHONO 6 x LINE 1 x MIC DJ assymm.	2.5mV/47kΩ 220mV/47kΩ 2.2mV/1kΩ	<-68dB <-96dB <-65dB	RIAA correction
Outputs			
2 x Master assymm. 1 x Recording/Aux 1 x Phones	1.5V/600Ω 775mV/2.5kΩ 12V/600Ω		Phones 600Ω-2kΩ

DEALER:

MANUFACTURED BY:

address: **Transtel Sabima Ltd.**
Harmoniestraat 13
B-2018 Antwerpen
Belgium

phone: **00 32(0)3/237-36-07**
fax: **00 32(0)3/216-97-62**

e-mail: **info@rodec.be**
URL: **http://www.rodec.be**

RODEC® is a registered trademark of Transtel Sabima Ltd. Copyright © Transtel Sabima Ltd. 2000 (All rights reserved).
Transtel Sabima Ltd. reserves the right to modify the design and/or specifications without prior notice.